



HM 087

90 Watt max | 8 Ω | \varnothing 87 mm / 3,5"



Potenza nominale	30 W	Re	7,3 Ω	D	67 mm
Impedenza nominale	8 Ω	Fs	270 Hz	Vas	0,22 dm³
Sensibilità (1W/1m)	89 dB	Qms	4,4	Bxl	4,14 Wb/m
\varnothing bobina mobile	20 mm	Qes	2,02	Xmax	1,1 mm
Altezza traferro	4 mm	Qts	1,39	η_e	0,20 %
Fori di fissaggio	4 \varnothing 5 / \varnothing 100	Mms	2,79 g	Le	0,2 mH
Foro pannello	77 mm	Cms	0,124 mm/N	Peso	0,37 Kg

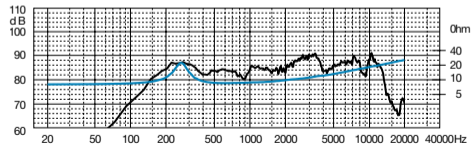

MID RANGE

Membrana in cellulosa smorzata, sospensione in tela
Doped paper cone, fabric surround

