


CS 160


120+120 Watt max | 4+4 Ω | \varnothing 160 mm / 6"



Potenza nominale	40+40 W	Re	3,6+3,6 Ω	D	130 mm
Impedenza nominale	4+4 Ω	Fs	62 Hz	Vas	15 dm³
Sensibilità (1W/1m)	90 dB	Qms	3,05	Bxl	3,66 Wb/m
\varnothing bobina mobile	32 mm	Qes	0,6	Xmax	2,5 mm
Altezza traferro	6 mm	Qts	0,5	η_o	0,61 %
Fori di fissaggio	4 \varnothing / \varnothing 158	Mms	11 g	Le	0,15 mH
Foro pannello	142 mm	Cms	0,6 mm/N	Peso	1,44 Kg



Parametri rilevati
con bobine mobili
in parallelo
Parameters taken
with coils in parallel

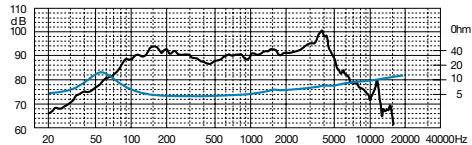

SUB WOOFER

Doppia bobina mobile, membrana in cellulosa smorzata e sospensione in poliuretano
Dual coil, doped paper cone, polyurethane surround

