


► SUB WOOFER

CS 320


► 180+180 Watt 4+4 Ω
 Ø 320 mm / 12"

■ SUB WOOFER

- Doppia bobina mobile, membrana in cellulosa smorzata e sospensione in tela
- Dual coil, doped paper cone, fabric surround



Potenza nominale	80+80 W	Re	3+3 Ω	D	258 mm
Impedenza nominale	4+4 Ω	Fs	45 Hz	Vas	107,3 dm ³
Sensibilità (1W/1m)	96 dB	Qms	2,93	Bxl	5,33
Ø bobina mobile	38 mm	Qes	0,68	Xmax	Wb/m
Altezza traferro	8 mm	Qts	0,55	η°	3,5 mm
Fori di fissaggio	8 Ø8 / Ø 296	Mms	42 g	Le	1,52 %
Foro pannello	285 mm	Cms	0,28	Peso	0,23 mH

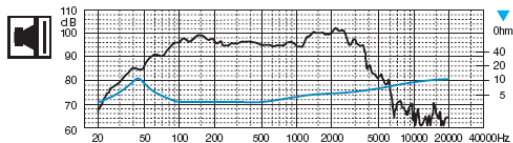

■ Parametri rilevati con bobine mobili in parallelo ■ Parameters taken with coils in parallel