


HT 050


90 Watt max | 8 Ω | \varnothing 50 mm / 2"



Potenza nominale	35 W	Re	5,4 Ω	D	-
Impedenza nominale	8 Ω	Fs	1,5 kHz	Vas	-
Sensibilità (1W/1m)	91 dB	Qms	-	Bxl	2,1 Wb/m
\varnothing bobina mobile	14 mm	Qes	-	Xmax	-
Altezza traferro	2 mm	Qts	-	η_o	-
Fori di fissaggio	4 \varnothing 4,5 / \varnothing 161	Mms	0,35 g	Le	0,08 mH
Foro pannello	50 mm	Cms	-	Peso	0,14 Kg



48x30 cm

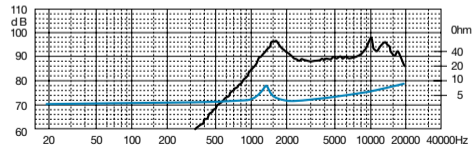

TWEETER

Membrana in cellulosa

Paper cone

